

# BOA™ PULSE COMPRESSOR SPECIFICATIONS (UV WAVELENGTHS)

Pulse compressor model:	BOA-200	BOA-260	BOA-350	BOA-400
<b>Wavelength range:</b>	175 - 225 nm	250 - 350 nm	300 - 450 nm	350 - 500 nm
<b>Max neg. GDD @ center wavelength<sup>1</sup>:</b>	-35,000 fs <sup>2</sup>	-36,000 fs <sup>2</sup>	-12,000 fs <sup>2</sup>	-22,000 fs <sup>2</sup>
<b>Transmission<sup>2</sup> @ shortest wavelength:</b>	> 55%	> 65%	> 65%	> 65%
<b>@ center wavelength:</b>	> 50%	> 60%	> 60%	> 60%
<b>Max bandwidth @ maximum GDD<sup>3</sup>:</b>	7 nm	12 nm	30 nm	23 nm
<b>@ half-maximum GDD :</b>	12 nm	20 nm	50 nm	40 nm
<b>Maximum peak power:</b>	500 MW			
<b>Total additional beam path:</b>	< 1.5 m			
<b>Pulse repetition rate:</b>	Any			
<b>Angular dispersion (dθ/dλ) added:</b>	0			
<b>Pulse-front tilt (dt/dx) added:</b>	0			
<b>Spatial chirp (dx/dλ) added:</b>	0			
<b>1D beam magnification:</b>	1			
<b>Output/input beam collinearity:</b>	< 10 mrad			
<b>Required input polarization:</b>	Horizontal			
<b>Polarization rotation:</b>	<0.1°			
<b>Required input-beam diameter:</b>	1 – 4 mm (collimated)			
<b>Input-beam lateral-displ. tolerance:</b>	1 mm			
<b>Number of alignment knobs:</b>	Zero			
<b>Time to set up:</b>	~ 10 minutes			
<b>Dimensions (L x W x H):</b>	46 cm x 13.5 cm x 16 cm			
<b>Weight:</b>	~ 10 kg			


1- Center wavelength in nanometers is the number following the "BOA-" in the device model. Wavelength-dependent data for the full operation range is given in the following pages.

2- The overall transmission depends on polarization purity and beam divergence. The indicated numbers are typical, experimentally obtainable values, not theoretical estimates.

3- As with all dispersive pulse compressors, the maximum bandwidth is limited by beam clipping on the second pass through the prism and so depends on the prism-corner-cube separation (and hence the device's maximum negative GDD). A unique advantage of the BOA single-prism/corner-cube design, which tunes GDD by varying this separation, however, is that, if less than the full negative GDD is needed, the beam path will be shorter, and, as a result, the compressor can accommodate a pulse with a larger bandwidth.


## ADDITIONAL NOTES

- The added angular dispersion, pulse-front tilt, and spatial chirp can be shown to always be identically zero and were all immeasurable in our experiments.
- If your beam is larger than 4 mm, please let us know, and we can easily design a pulse compressor with a larger aperture at no extra cost.
- Alignment of the pulse compressor into a beam is achieved using a simple trick: back-reflection off a removable glass window (provided) is used to make sure the beam is incident perpendicularly to the compressor-axis. Once you do this, simply remove the window. You are all set to compress your pulses.
- The pulse compressor itself is auto-aligning, so no alignment knobs are required for internal components.
- Motorized and computer-controlled versions are available upon request.

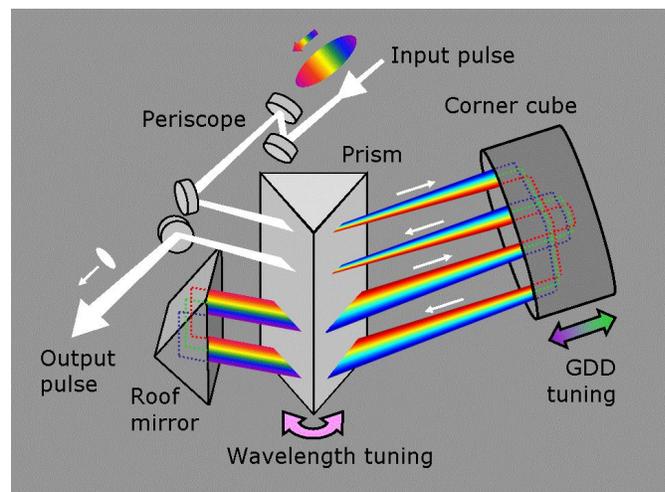


Layout for the BOA single-prism pulse compressor



## Single Prism Pulse Compressor, BOA-200

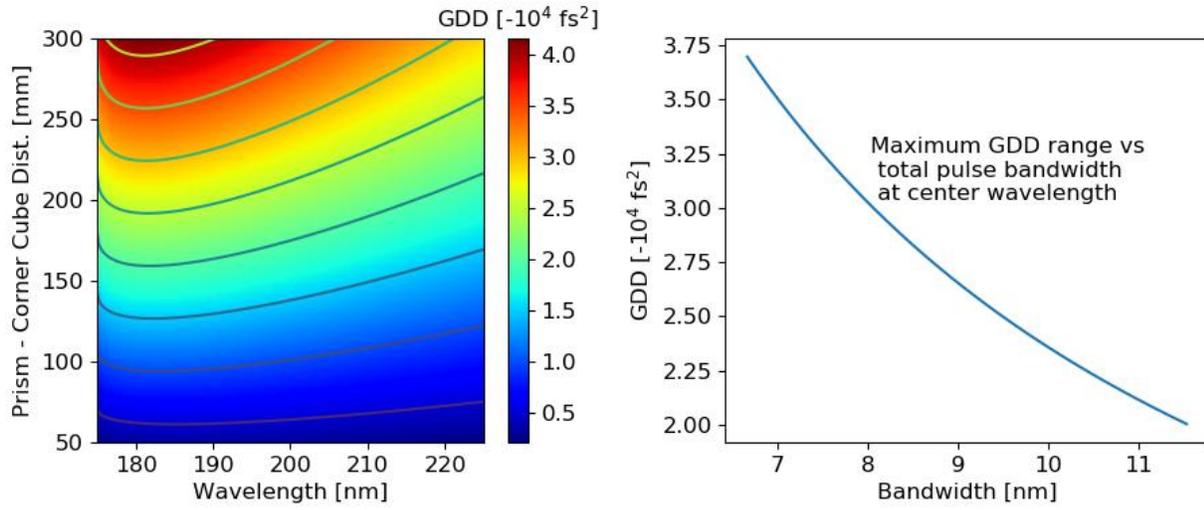

## Single Prism Pulse Compressor, BOA-266

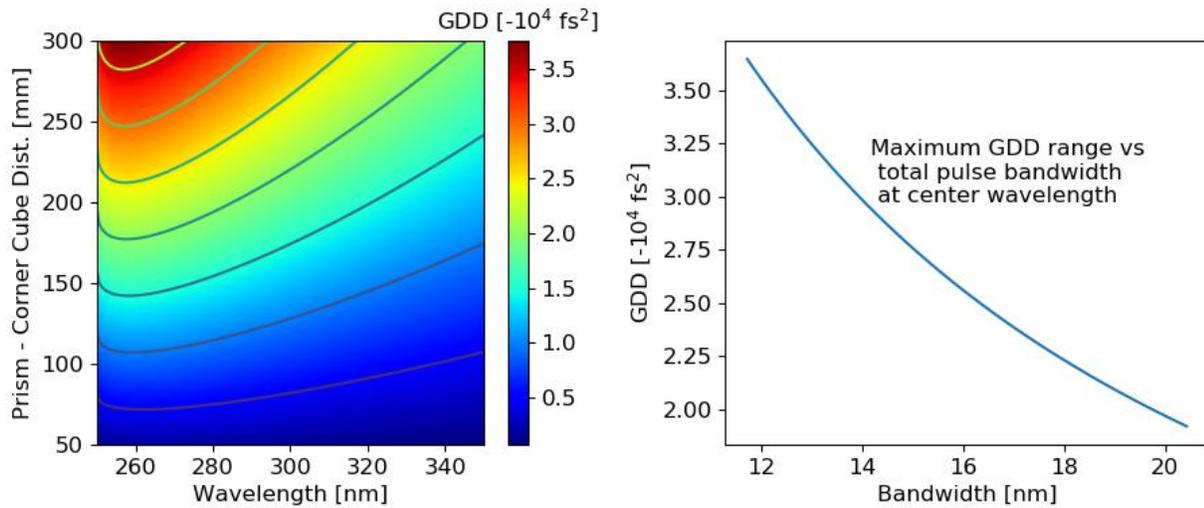

### Single Prism Pulse Compressor, BOA-355

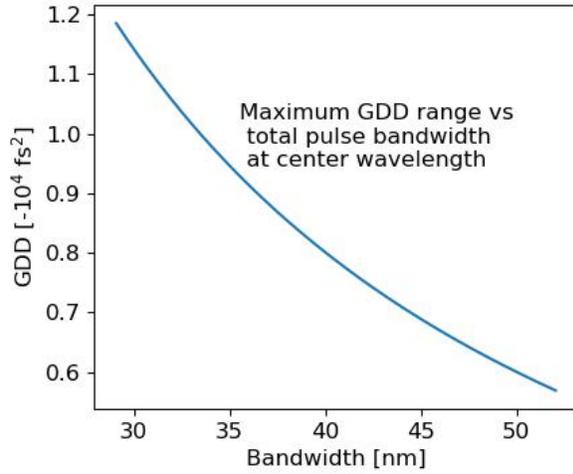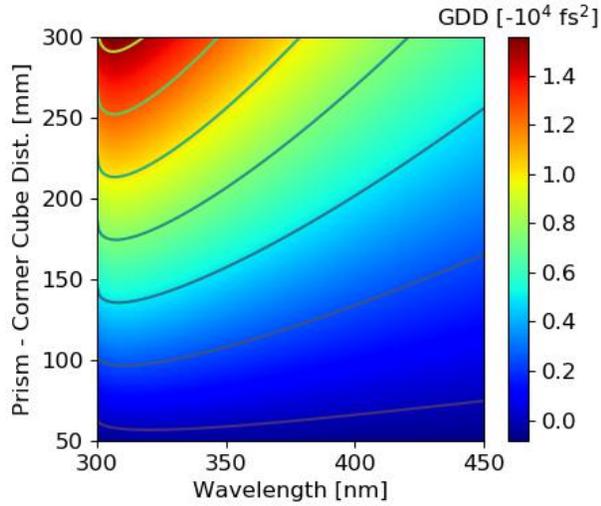

### Single Prism Pulse Compressor, BOA-400

